

MK SENTRY



Spares Covers/Lids



Description

The box is made of galvanized cold-rolled steel, the thickness is 1mm with Anti-Shock function.

Door and side panels are sprayed with electrostatic powder, Spray coating is up to 40µm, Adhesion firm, uniform color, no wrinkles, peeling, spots, leakage and spray and other adverse phenomena.

The internal parts of the box also have been galvanized, which has good anti-corrosion function. soldering firm, no ash, pseudo soldering, burr and other phenomena.

Installation


It includes 4, 8, 12, 16 and 21 way options, can be matched with the standard base of the same model in the market, available for different customers and installation sites. The gap between the door and the cover is less than 1mm so it's can play a good dust-proof effect.

Standards and approvals

The MK spare covers/lids is designed to comply fully with the requirements of BS EN 61439-3.

Dimensions (mm)

Consumer unit

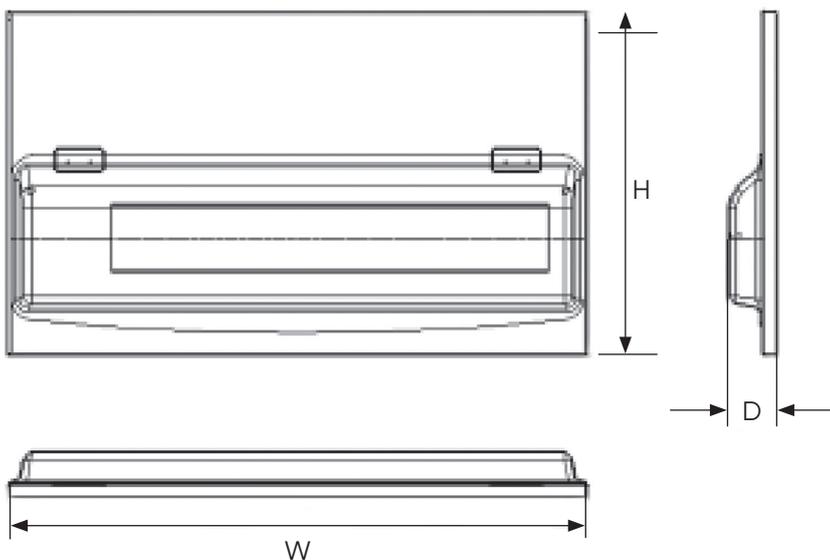

TECHNICAL SPECIFICATION

ELECTRICAL

PRIMARY VOLTAGE
220V/240V a.c. 50Hz

AMBIENT OPERATING TEMP
-5°C to +40°C

IP RATING
IP4X Front face ,IP3X Sides

POWER FREQUENCY WITHSTAND
VOLTAGE 2500V

MAX. INSTALLATION ALTITUDE
2000 metres

METAL CONSUMER UNITS

TYPE	DIMENSIONS		
	W	H	C
8 WAY REPLACEMENT FRONT COVER	145		
8 WAY REPLACEMENT FRONT COVER	238		
12 WAY REPLACEMENT FRONT COVER	310	245	32
16 WAY REPLACEMENT FRONT COVER	384		
21 WAY REPLACEMENT FRONT COVER	473		

CircPro (UK) Limited
3C Lamson Road,
Rainham, Essex RM13 9YY
Phone: 01708 986180
Email: enquiries@circpro.co.uk
www.circpro.co.uk

Made in China
The MK Trademark is used under license from Novar ED&S Limited
Novar ED&S Limited makes no representations or warranties with respect to this product.
This product is manufactured by CircPro (UK) Limited, a division of Yihua.

